GH Phipps CONSTRUCTION COMPANIES

5995 Greenwood Plaza Blvd.
Suite 100
Greenwood Village, CO 80111-4710
303-571-5377
303-629-7467 (fax)

TRANSMITTAL

No. 14D1639-0082

PROJECT: UCD-Chancellor's Suite

DATE: 10/01/2014

TO: Humphries Poli Architects
2100 Downing St
Denver CO 80205

RE: 11000-Equipment

ATTN: Jenna Mersy

Ph/Fax:

JOB: 14D1639

WE ARE SENDING:	SUBMITTED FOR:	ACTION TAKEN:
☐ Shop Drawings	☑ Approval	☐ Approved as Submitted
☐ Letter	☐ Your Use	☐ Approved as Noted
☐ Prints	☐ As Requested	☐ Returned After Loan
☐ Change Order	☐ Review and Comment	☐ Resubmit
☐ Plans		☐ Submit
☐ Samples	**SENT VIA:**	☐ Returned
☑ Specifications / Product Data	☐ Attached	☐ Returned for Corrections
☐ Other:	☐ Separate Cover Via:	☑ Due Date: 10/15/2014

NOTES:

Item	*Package*	*Code*	*Rev.*	*Copies*	*Date*	*Description*	*Status*
Submittal	11000	113100-01	1		10/01/2014	Appliances PD	Architect Review

CC:

Signed:

Michael Josich

(UC/ REF - ALUMNI SUITE BLK/SST)

Cole-Parmer is a post-manufacture brand name put on product manufactured by AVANTI. Please confirm this model # by AVANTI is acceptable

Model RM4536SS - 4.5 CF Counterhigh Refrigerator - Black w/Stainless Steel Door

Features

- 4.5 CU. FT. CAPACITY
- Beverage Can Dispenser Holds Up to Five 12 oz. Cans
- Flush Back Design
- Recessed Handle
- Door Rack Holds 2-Liter Bottle
- Separate Full Width Chiller Compartment for Short Term Storage
- Sturdy Slide Out Shelves
- Reversible Door - Left or Right Swing
- Door Bins for Extra Storage
- ADA Compliant
- R600A CFC Free Refrigerant
- Free standing installation only. Proper ventilation is required to maintain satisfactory cooling and overall performance. See owner's manual for proper installation requirements.

HOSPITALITY
Click HERE for Hospitality Products

Specifications

Net Capacity	4.5 Cu. Ft.
Color	Black w/Stainless Steel Door
Unit Dimensions	32.25" H x 20.25" W x 21.5" D
Carton Dimensions	33.5" H x 22.25" W x 23.25" D
Unit Weight	48 Lbs.
Shipping Weight	55 Lbs.
Power	110V / 60HZ
Reversible Door	Yes

Instruction Manual: Model RM4536SS - 4.5 CF Counterhigh Refrigerator - Black w/Stainless Steel Door
Parts & Accessories: Model RM4536SS - 4.5 CF Counterhigh Refrigerator - Black w/Stainless Steel Door
Door Reversal Instructions: Model RM4536SS - 4.5 CF Counterhigh Refrigerator - Black w/Stainless Steel Door
Energy Guide Label: Model RM4536SS - 4.5 CF Counterhigh Refrigerator - Black w/Stainless Steel Door

Copyright © 2009 Avanti Products :: All Rights Reserved

Whirlpool® Bottom Mount Refrigerator

(REF - BREAKROOM SST)

PRODUCT MODEL NUMBERS

WRB322DMB WRB329DMB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

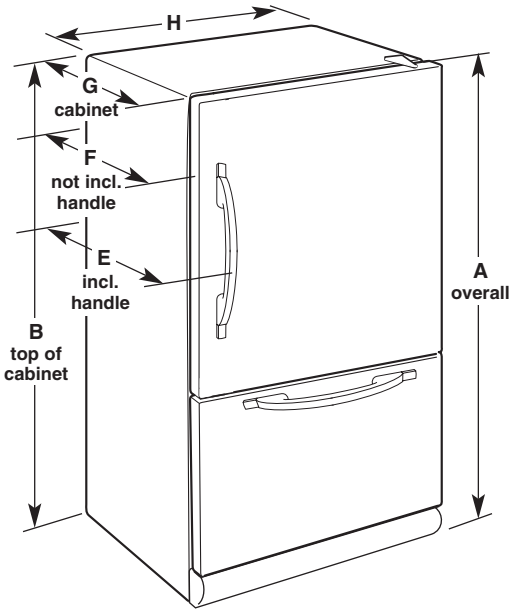

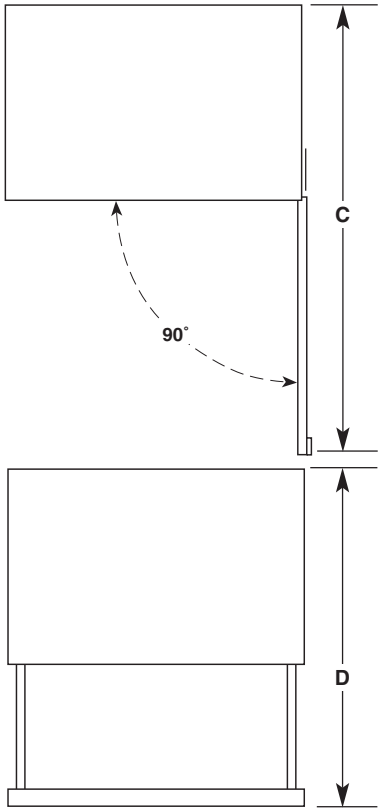

Model Number	Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"
WRB322DMB	21.9 cu. ft.	70" (177.8 cm)	68½" (174 cm)	62" (157.5 cm)	50¾" (128.9 cm)	33⅜" (84.8 cm)	30⅞" (78.4 cm)	28⅛" (71.4 cm)	32⅝" (82.9 cm)
WRB329DMB	18.5 cu. ft.	67" (170.2 cm)	65½" (166.4 cm)	59" (149.9 cm)	50¾" (128.9 cm)	33⅜" (84.8 cm)	30⅞" (78.4 cm)	28⅛" (71.4 cm)	29⅝" (75.2 cm)

LOCATION REQUIREMENTS

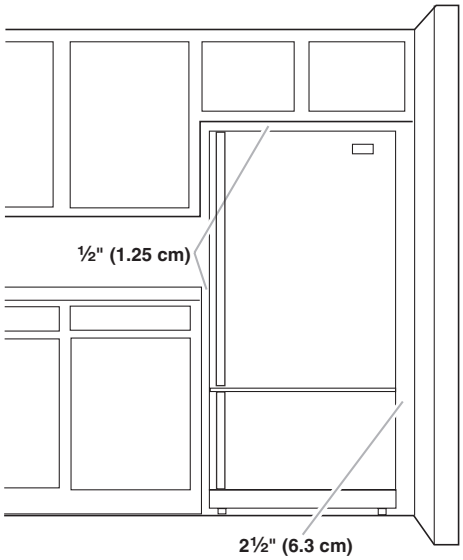

To ensure proper ventilation for your refrigerator, allow for a ½" (1.25 cm) space on each side and at the top. Allow at least 1" (2.54 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2½" (6.3 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10597594B
6/13/14

Whirlpool® Bottom Mount Refrigerator

(REF 2 - ALUMNI STORAGE BLK)

PRODUCT MODEL NUMBERS

WRF532SMB WRF535SWB
WRF535SMB WRF540CWB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

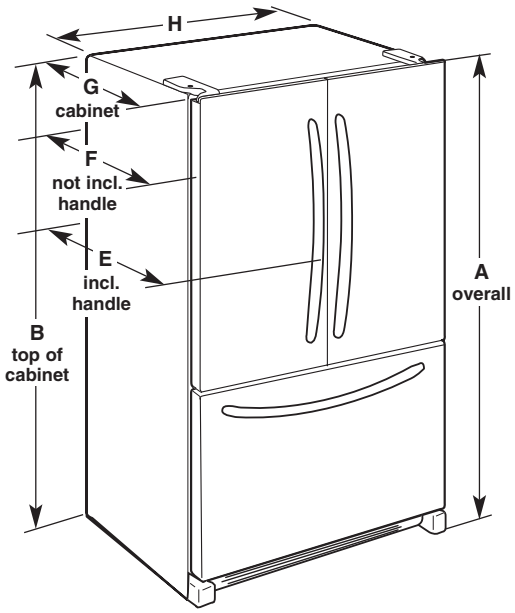

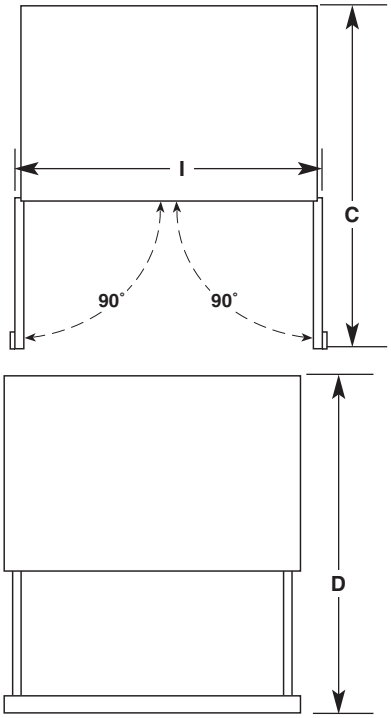

Model Number/ Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
WRF535SWB 25.2 cu. ft.	70⅛" (178.1 cm)	68 13/16" (174.8 cm)	48 1/16" (122.1 cm)	53⅛" (135 cm)	35 7/16" (90 cm)	32 15/16" (83.7 cm)	29⅛" (74 cm)	35⅝" (90.5 cm)	43⅜" (110.2 cm)
WRF535SMB 24.8 cu. ft.	70⅛" (178.1 cm)	68 13/16" (174.8 cm)	48 1/16" (122.1 cm)	53⅛" (135 cm)	35 7/16" (90 cm)	32 15/16" (83.7 cm)	29⅛" (74 cm)	35⅝" (90.5 cm)	43⅜" (110.2 cm)
WRF532SMB 21.7 cu. ft.	70⅛" (178.1 cm)	68 13/16" (174.8 cm)	47 1/16" (119.5 cm)	52⅛" (132.4 cm)	34 7/16" (87.5 cm)	31 15/16" (81.1 cm)	28⅛" (71.4 cm)	32⅝" (82.9 cm)	42⅜" (107.6 cm)
WRF540CWB 20 cu. ft.	70⅛" (178.1 cm)	68 13/16" (174.8 cm)	48" (121.9 cm)	44½" (113.0 cm)	29⅜" (74.6 cm)	28" (71.1 cm)	24⅛" (61.3 cm)	35⅝" (90.5 cm)	39⅜" (100.0 cm)

LOCATION REQUIREMENTS

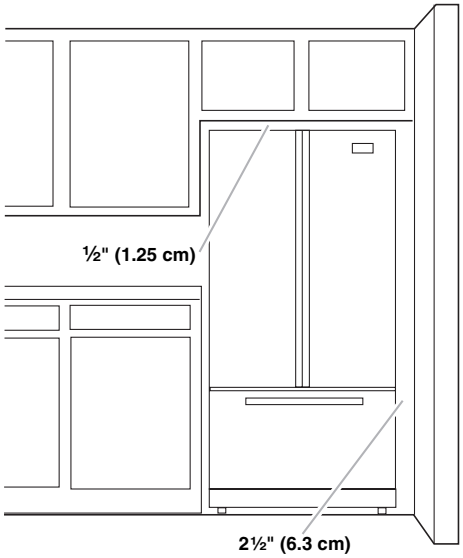

To ensure proper ventilation for your refrigerator, allow for a ½" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2½" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10597594B
6/25/14